

Digital Compression Load Cell - Type DL



0-5.000kg

Special Features

- Robust capacitive technology
- High tolerance of up to 1.000% overload
- Stainless steel
- Hermetically sealed to IP68
- Laser welded
- ATEX version available (Zone 1, 2, 21, 22)
- Low profile and hygienic design
- High Accuracy, High resolution
- Withstands welding voltages and ESD
- Cable length up to 100meters
- Load cell cable replaceable
- Calibration independent of cable length
- Easy mechanical and electrical installation
- Can be used in both ATEX and non-ATEX installations



Applications

- | | |
|----------------------|---------------------------|
| • Tank weighing | • Level measurement |
| • Process weighing | • Platform scales |
| • Big-bag equipment | • Hopper scales |
| • Filling and dosing | • Heavy duty applications |
| • Offshore | • Belt scales |

Options


- ATEX (Zone 1, 2, 21, 22) version type DLA
- ATEX II 2G Ex ia IIC T6 / ATEX II 2D Ex iaD 21 T85°C
- Base plate available
- Load cell cable length 10, 20, 50 or 100meters

Order information

Type	DL	Capacity	2.000	Accuracy	0.025%

Digital Compression Load Cell – Type DL

Dimensions (mm)

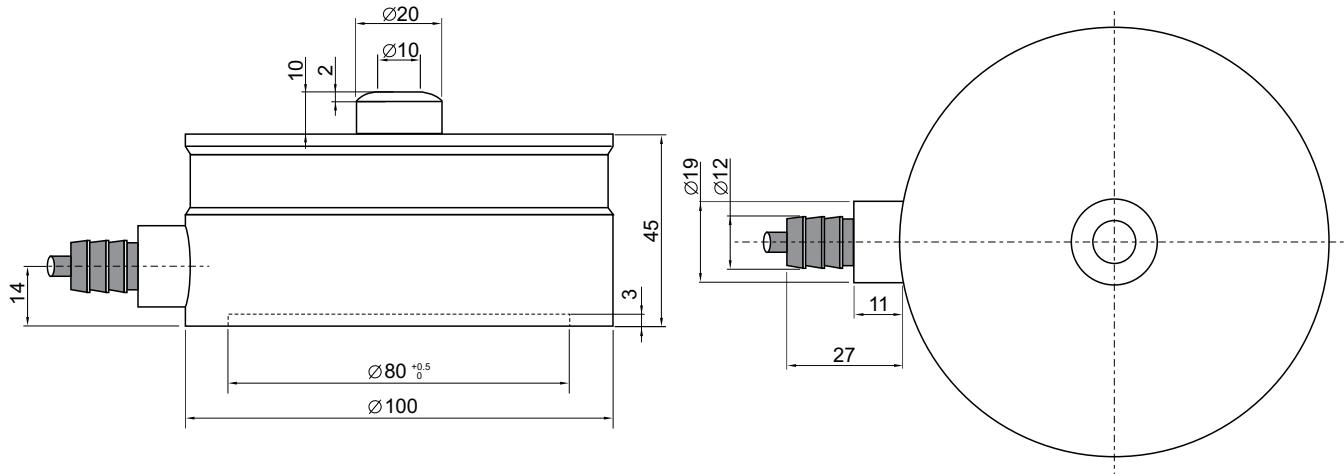

4000 Generation Load Cells

Parameter	Unit	0.10%	0.05%	0.025%
Rated capacity (Emax)	kg		50, 100, 150, 250, 500, 1.000 1.500, 2.000, 3.000, 4.000, 5.000	
Safe overload limit	% of Emax		300 to 1.000	
Safe sideload limit	% of Emax		500 to 2.000	
Minimum dead load	% of Emax		0	
Accuracy	% of Emax	0.060	0.040	0.020
Repeatability	% of Emax	0.020	0.010	0.008
Hysteresis	% of Emax	0.060	0.040	0.020
Creep 30min.	% of Emax	0.060	0.040	0.020
Temperature effect on zero	% /10 °C	0.050	0.030	0.009
Temperature effect on sensitivity	% /10 °C	0.050	0.030	0.009
Compensated temperature range	°C		-10 to 50	
Operating temperature range	°C		-50 to 70 (100*)	
Deflection at Emax	mm		Max 0.10	
Measuring rate	Hz		Up to 1.000	
Supply	Vdc		24Vdc ±10%	
Internal resolution	Bit		24	
Material			Stainless Steel 17-4 PH and AISI 316	
Protection			IP68	
Cable			6meter standard coaxial RG-58 (Ø6mm) with BNC connector	
Maximum cable length	m		100	
Weight	kg		1.7	
Output options			Profibus DP, DeviceNet, Modbus ASCII/RTU, EtherCAT EtherNet/IP, RS485, 4-20mA, 0-10Vdc	

* with Teflon cable